

AquaPrime[™] Cloth Media Filter

A Solution for Primary Treatment and Wet Weather Applications



AquaPrime™ Cloth Media Filter

Featuring OptiFiber® Pile Cloth Media

The AquaPrime cloth media filtration system is designed as an economical and efficient solution for the treatment of primary wastewater and wet weather applications. This system utilizes a disk configuration and the exclusive OptiFiber PF-14™ pile cloth filtration media to effectively filter high solids waste streams without the use of chemicals. This system is ideal for primary wastewater treatment and wet weather applications due to its proven removal efficiencies and high quality effluent, even under varying influent conditions.

The AquaPrime system is designed to handle a wide range of flows in a fraction of space compared to conventional primary clarifiers. The system's high solids removal in comparison to conventional treatment provides energy and operational savings within the wastewater treatment plant due to reduced loads to the secondary process or more solids for anaerobic digestion (energy harvesting).

Features and Advantages


- · Vertically oriented cloth media disks reduce required footprint
- Each disk is lightweight, with removable segments for ease of maintenance
- Effective backwash system that fluidizes cloth fibers to release stored solids
- · Specifically designed floatable and solids removal zones
- · Available in several configurations
- Fully automatic PLC control with color touchscreen HMI
- Reduced energy costs in the secondary process due to a reduction in organic loading
- Can be configured for dual use application for tertiary and wet weather operation
- Simple start-up with unattended operation for remote locations
- More solids for increased gas production in anaerobic digesters for primary applications

Applications

- · Primary Filtration
- · Primary Effluent Filtration
- Stormwater
- Sanitary Sewer Overflow (SSO)
- · Combined Sewer Overflow (CSO)
- · High Solids Applications (Municipal and Industrial)



An AquaPrime[™] system operating at a municipality for primary treatment.

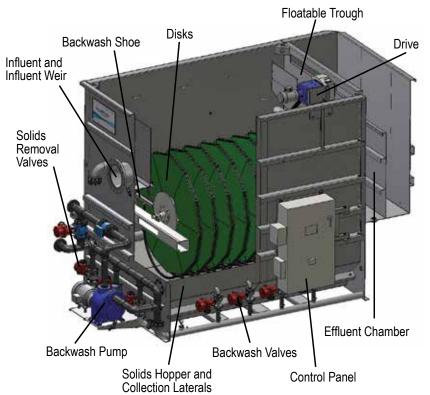

Typical Locations For AquaPrime™ Treatment

Primary Filtration Screened Influent Secondary Process Effluent Wet Weather Wet Weather Bypass Frimary Clarifier Screened Influent Secondary Process Secondary Clarifier Wet Weather Bypass Modes of Operation Waste

The AquaPrime cloth media filtration system operates on four (4) modes of operation: FILTRATION, BACKWASH, SOLIDS WASTING and FLOATABLE WASTING. For graphical representation, the AquaPrime modes of operation are described below:



Filtration Mode:

- Influent wastewater/wet weather flow enters the filter by gravity
- Stationary cloth media disks are completely submerged
- Solids deposit on the outside of the cloth media forming a mat as filtrate flows through the media
- Tank liquid level rises as headloss builds due to the collection of solids
- Filtrate is collected in the hollow center tube and discharged over an effluent weir
- Heavier solids settle to the specifically designed hoppered tank bottom



Backwash Mode:

- Solids are backwashed at a predetermined liquid level or time
- Backwash shoes directly contact the cloth media and solids are removed by vacuum pressure using a backwash pump
- Disks rotate slowly and two disks are backwashed at a time (unless a single disk is utilized)
- Filtration is not interrupted

 Backwash water is directed to waste handling facilities (thickening, digester, etc.)



Solids Wasting Mode

- Heavier solids in the collection hopper are removed on an intermittent basis
- Backwash/Solids Pump provides suction to the solids collection manifold for wasting of settled solids
- Solids are pumped back to the waste handling facilities (thickening, digesters, etc.)



Floatable Wasting Mode

- Floatable scum is allowed to collect on the water surface
- After a preset number of backwashes, the water level is allowed to rise above the preset high level
- As the water level increases, floating scum is removed by flowing over the scum removal weir
- Scum wasting water is directed to the plant's waste handling facility





Providing TOTAL Water Management Solutions

Visit our website at www.aqua-aerobic.com to learn more about AquaPrime™ Cloth Media Filters and our complete line of products and services:

Aeration & Mixing
Biological Processes
Filtration

Disinfection

Membranes

Controls & Monitoring Systems

Aftermarket Products and Services



6306 N. Alpine Rd. Loves Park, IL 61111-7655 p 815.654.2501 f 815.654.2508 www.aqua-aerobic.com solutions@aqua-aerobic.com

The information contained herein relative to data, dimensions and recommendations as to size, power and assembly are for purpose of estimation only. These values should not be assumed to be universally applicable to specific design problems. Particular designs, installations and plants may call for specific requirements. Consult Aqua-Aerobic Systems, inc. for exact recommendations or specific needs. Patents Apply.

© 2016 Aqua-Aerobic Systems, Inc. Bulletin #260 9/16